



AP-IP100™

BcN IP Phone

High Performance Broadband Convergence Network
IP Phone Solution

CTI Application

AddPac

AddPac Technology

www.addpac.com

Contents

- AP-IP100E H/W Specification
- CTI Application using Caller ID
- Network Diagram
- Message Flow

AP-IP100E H/W Specification

- **RISC+DSP Microprocessor Computing Power (Dual Processor Architecture)**
- **FXO Interface for PSTN : AP-IP100E**
- **High quality Audio and Voice Interface**
 - Stereo Audio Input Connector
 - Stereo Audio Output Connector
- **Network Interface**
 - Two(2) 10/100Mbps Fast Ethernet
- **LCD Window : 66.54mm x 33.26mm(Active Area)**
Graphic LCD
- **Power Supply**
 - External Power Adaptor (5V, 2A)




FXO Interface for PSTN


CTI using CID

- Simple CTI (Computer and Telephony Integration) Application
- AddPac IP-Phone or VoIP Gateway send CID information to CTI application via TCP/UDP socket
- CTI application get caller information using HTTP or custom specific protocol

Basic Network Diagram

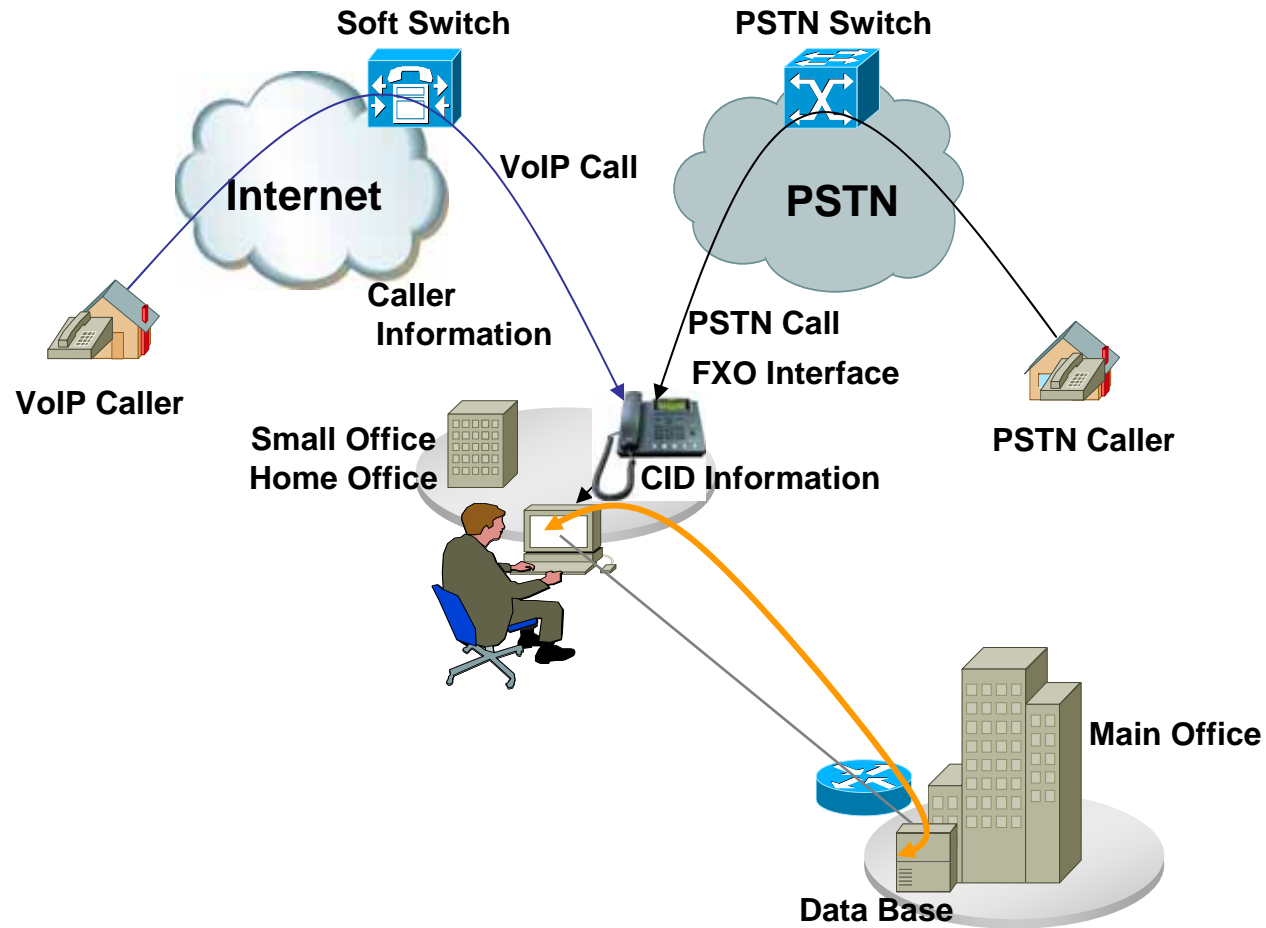

Message Flow

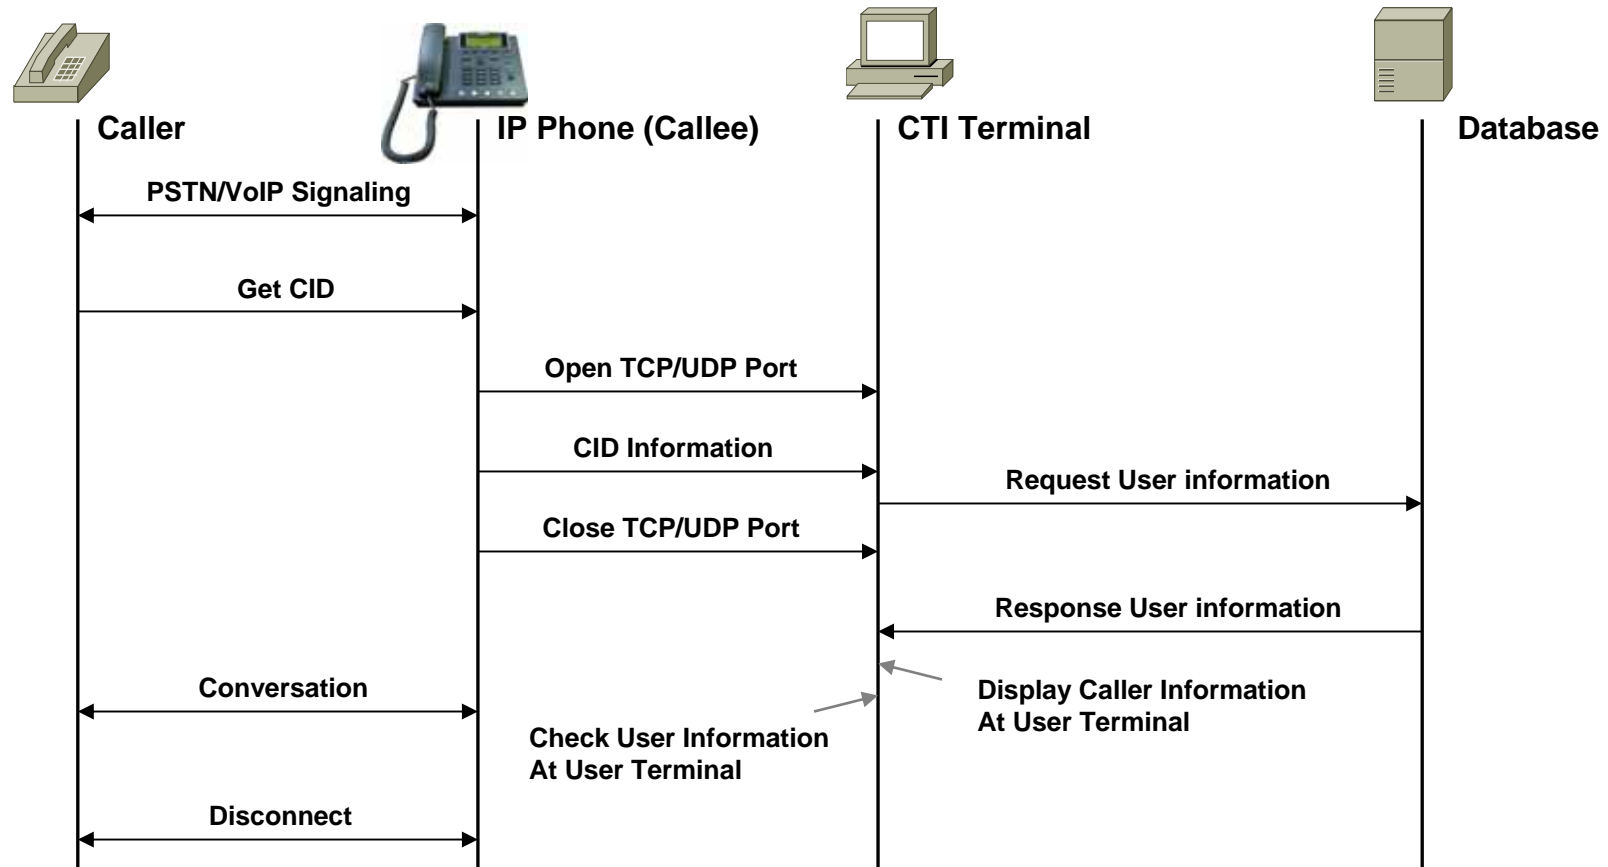

IP Phone Series

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com