



## AP-MC2000 High Performance Video MCU

AP-MC2000 is a central video processing solution which provides a wide variety of features such as easy and high level conference control, user-friendly management, powerful video decoding/mixing/encoding, transcoding and switching capability through reliable real-time encoding and decoding of transmitted audio data from multiple IP video endpoints such as IP Video Phone, Video Conference Equipment, Video Gateway. AP-MC2000 provides a complete solution specifically for small & medium size video conferences with multiple sites participating which are implemented technically by connecting mixed video data stream from independent terminals to single 'virtual group' for central mixing and transcoding process. Designed on the basis of firmware upgradeable high performance DSP + Host Processor, AP-MC2000 supports not only latest audio/video codec currently but has capabilities of new codec services leveraging continuous firmware level upgrade. AP-MC2000 is also a key component of a comprehensive solution combined with AddPac IP-PBX (especially large capacity, IPNext5000, IPNext10000, etc), IP terminal equipments such as AP-VP500, AP-VP300 IP video phones, AP-VC2000, AP-VC1000 video conference equipments for multipoint video conferencing, which provides easy-to-use user interfaces, robust performance and excellent video quality.

AP-MC2000 MCU system for multipoint video conferencing features one(1) Gigabit Ethernet interfaces, a RS-232C console port for maintenance. AP-MC2000 provides a full suit of functionality for rich multipoint video conferencing experience including a wide range of transcoding coverage from voice band G.722, G.711, G.726, G.729, G.723.1, etc audio codec to H.263, H.264, MPEG-4 video codec. Also, AP-MC2000 IP Video Conference MCU support various video conference type like as Meet-me (Dial-in), Ad-Hoc (On-Demand) and Scheduled Video Conference mode. AP-MC2000 Video MCU is designed to support the multi-session/multi-user video conferencing. This feature maximizes the utilization of AP-MC2000 IP Video Conference MCU in large scale enterprise.

AP-MC2000 IP Video conference MCU supports various video display layout functions, dynamic control function, floor function, name display function, boarder display function, etc. The video display layout function is divided as symmetric picture size, asymmetric picture size. According to video conference room size (number of conference participant, for example, 8 party room), AP-MC2000 provides the various video display layouts. Administrator can select to a video display layout among the multiple video display layouts via AP-MC2000 manager program. When a new video conference is started, users can choice a specific video layout automatically or manually. Dynamic control function is used when video display layout is changed dynamically or conference participant is move out/in during video conferencing.

## Main Features

- AP-MC2000 is a video conference MCU equipment that allows you to build a multi-media system in order to integrate voice, audio, and data based on video communications.
- Supports the state-of-art codec algorithm for voice and audio services as well as video codecs such as H.263, MPEG-4, and H.264.
- Various Video Resolution Support : QCIF, CIF, QVGA, VGA, etc
- Various Video MCU Display Layout Support
  - Symmetric, Asymmetric
  - Auto , Manual Mode
- Dynamic Session Management Support
- Voice Activity Switching or Voice Detect Switching Support for Dynamic Participant Display
- Floor Function, Name Display, Border Attribute Support
- Personal Picture Control (Codec, Picture Size, etc)
- Virtual Audience Support
- Meet-Me, Add-Hoc, Dial-Out Video Conferencing Signaling Support.
- SIP, H.323 VoIP Signaling Support
- Ensures the best voice quality on a regular IP-based Internet network that provides an asymmetrical bandwidth.
- One(1) Gigabit Ethernet Interface Support
- Allows you to set up configuration and your network environment by MS-Window based Smart Multimedia Manager S/W
- Supports Smart Video Conference Recording Solution (PC, MS-Window based Multisession Video Conference Recording S/W): Option
- Ensures extensibility, reliability, and authenticity since the APOS inter-networking software of AddPac is installed.

## AP-MC2000 Applications

- IP Video conferencing system
- IP multimedia telephony solution

## General Hardware Specifications

<b>CPU</b>	High Performance Processor + DSP Architecture
<b>Memory</b>	1 Giga DDR2 SDRAM
<b>Network Interface</b>	One(1)-port 10/100/1000Mbps Gigabit Ethernet (LAN 0)
<b>Console Interface</b>	1-port RS-232C Console Interface
<b>Operation Environment</b>	Temperature 0℃ ~ +45℃ (operating), -40℃ ~ +85℃ (storage), Humidity 5% ~ 95%
<b>Power Supply</b>	AC110~220VAC 50/60Hz, 300Watt Free Voltage
<b>Dimension</b>	80mm x 440mm x 380mm (H x W x D)
<b>Weight</b>	7.4Kg

## Video Display Layout

<b>Video Display Layout</b>	Symmetric, Asymmetric Layout Auto, Manual
<b>Dynamic Session Control</b>	Dynamic Layout Change Dynamic Participant Movement
<b>Floor Function</b>	
<b>Name Display Function</b>	
<b>Boarder Function</b>	

## Audio Service and Signaling Protocol Features

<b>Voice and Audio Codec</b>	G.711, G.723.1, G.726, G.729, G.722, etc
<b>VoIP Signaling Protocol</b>	SIP/H.323 VoIP Signaling Protocol (Dual Stack) ITU-T H.323 Gateway, Gatekeeper Support SIP Proxy Server Interoperability
<b>Voice Processing</b>	VAD, CNG, Dynamic Jitter Buffer Operation
<b>DTMF</b>	Detection and Generation, RFC 2833 Compliant
<b>Voice QoS</b>	Enhanced QoS Management for Voice Traffic

## Video End-Point Control

<b>Personal Picture Control</b>	Codec, Picture Size ,etc
<b>Personal Layout Control</b>	
<b>Dynamic Participant Display</b>	Voice Activity Switching (Voice Detect Switching) Remote Control (Remocon)
<b>MIC Mute</b>	Turn Off MIC of a invisible participant
<b>Forced Mute (audio, video)</b>	Can mute Audio/Video of a participant (Video Phone)
<b>Virtual Audience</b>	Broadcasting Solution
<b>Dial-in</b>	Even in Dial-out started video conference, can join the Video conference if a participant knows the conference Room number in outside.


## Video MCU Services and Features

<b>Video Codec</b>	H.263, H.263+ , MPEG4, and H.264 (MPEG4 part 10)
<b>Video Format</b>	QCIF(176x144), CIF(352x288), 4CIF(704x576), QVGA(320x240), VGA(640x480)
<b>Operating Bandwidth</b>	64Kbps ~ Several Mbps
<b>Video QoS Features</b>	Enhanced QoS Management for Video Traffic High-end Error Resilience Support on IP Network Rate Control for Best Video Quality Frame Rate Control at a Limited Bandwidth Video Error Concealment Service
<b>Conference Signaling</b>	Meet-Me, Add-Hoc, Dial-Out Conferencing Signaling Support, and Control by GUI based Smart Multi-media Manager (SMM) Software
<b>VoIP Signaling</b>	SIP, H.323 VoIP Signaling Support
<b>Document Sharing</b>	H.239 Document Signaling Support
<b>Video Codec Interoperability</b>	Polycom, Tandberg, and Sony Video Conferencing Products with Standard H.323, H.263 based Video Codec, and so on
<b>Control and Setting</b>	Smart Multimedia Manager Software (MS window)
<b>Video Conference Recording</b>	Smart VCR(Video Conference Recording) Software (MS Window) : Option
<b>Major Video Application</b>	Voice and Video Telephony, Video Conferencing, Audio/Video Broadcasting, VoD Service, etc.
<b>Secure Video Conference</b>	AES, Secure RTP, etc

## WAN, LAN, IP Services and Other Features

<b>WAN Protocol</b>	Point-to-Point Protocol (PPPoE) for ADSL
<b>Network Management</b>	Standard SNMP Agent (MIB v2) Support, Console, Telnet, Remote Firmware Upgrade via FTP/TFTP Support
<b>Security Features</b>	IP Packet Filtering, Access List, Access Control and Data Protections, Enable/Disable for Specific- Protocols Multi-level User Account Management
<b>Operation &amp; Management</b>	Configuration Backup and Restore Management, Debugging and Diagnosis Features, System Booting/Rebooting through Watch-Dog, etc.
<b>Other Features</b>	DHCP Server and Relay, Network Address Translation (NAT), Port Address Translation (PAT), IEEE Standard Transparent Bridging, CLI, etc.

## Network Diagram

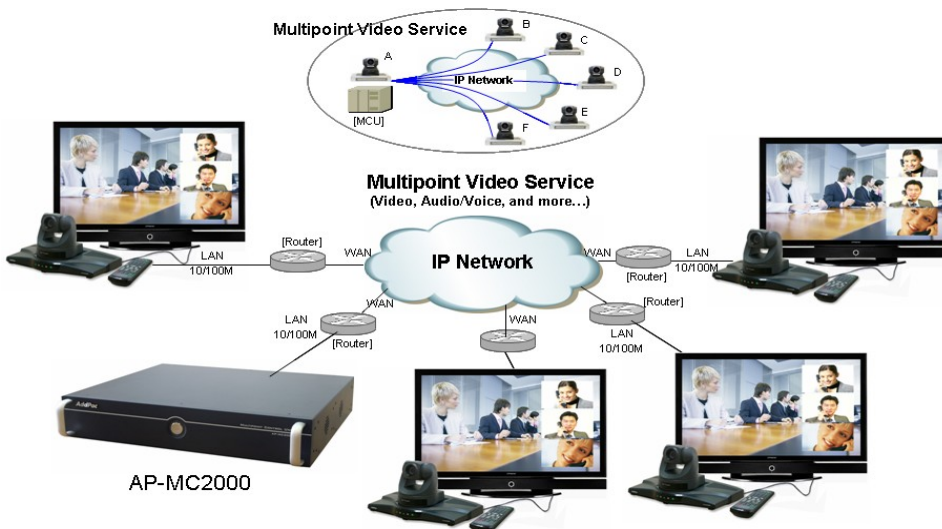

## Ordering Information

• AP-MC2000	High Performance Video MCU
• CAB-LAN	Ethernet Cable
• CAB-CON	RS-232C Console Cable
• SMM S/W	Smart Multimedia Manager S/W
• SVCR (Option)	Smart Video Conference Recording S/W