

GSM SOHO Gateway Function Overview



AddPac

AddPac Technology


2010, Sales and Marketing

www.addpac.com


Contents

- GSM Outbound Call
- GSM Inbound Call
- VoIP to GSM Outbound Call
- VoIP to GSM Inbound Call
- GSM Inbound Black / White list
- VoIP to GSM Black / White list
- WEB Callback Service
- Callback Service
- LCR(Least Cost Routing)
- GSM Messaging Service
- Radius Server Interoperability
- PIN Code Protection


GSM Outbound Call

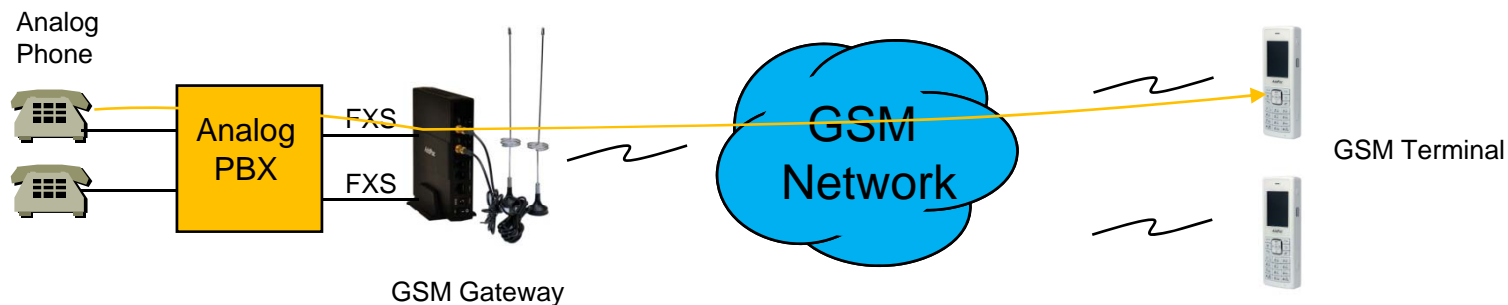

One(1) Stage Call

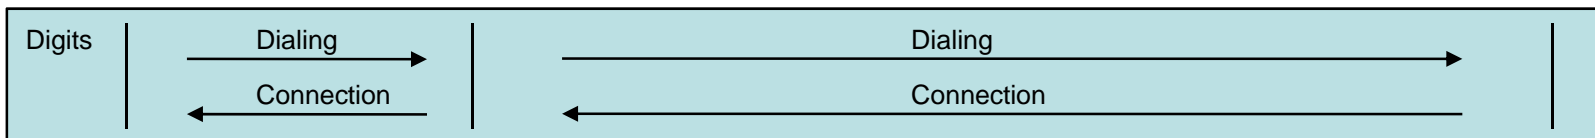

Two(2) Stage Call

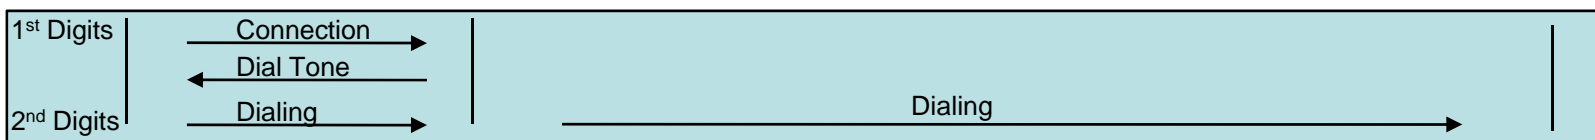


Outbound Call (1 Stage)

: Making call to mobile phone from analog phone connected to FXS directly.


Outbound Call (2 Stage)

: Making call to mobile phone from analog phone connected to FXS after hearing of 2nd dial tone from AddPac GSM Gateway


GSM Inbound Call

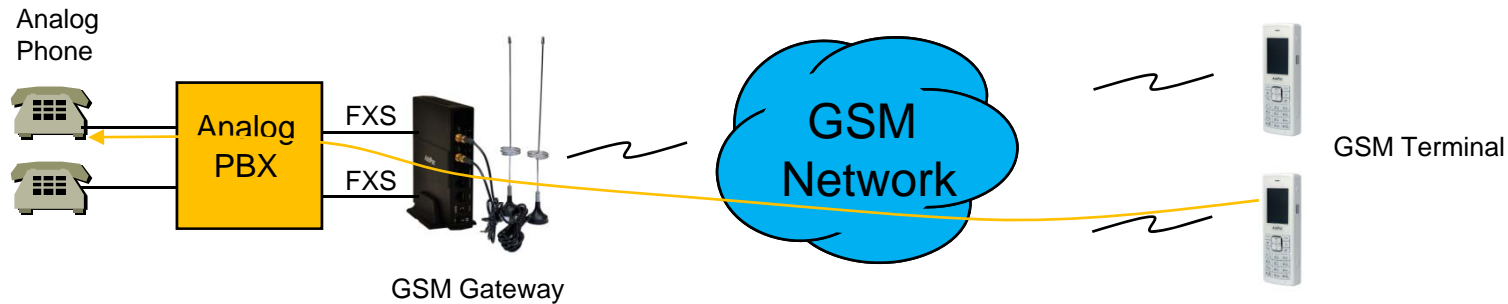

1 Stage Call (Baby Call)

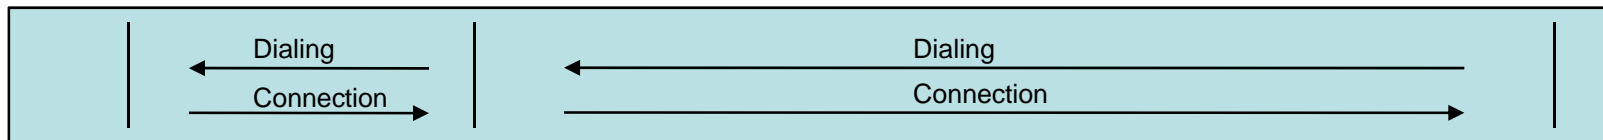

2 Stage Call

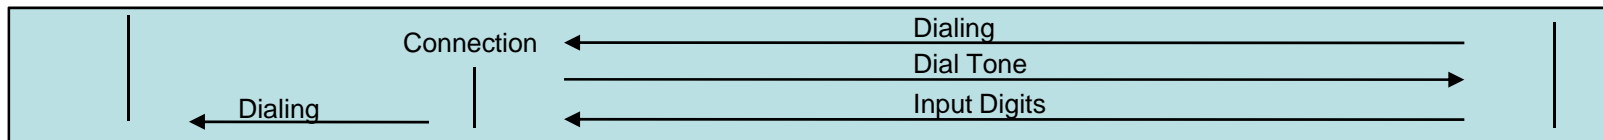


Inbound Call (1 Stage) – Baby Call

: Making call to analog phone connected to FXS directly


Inbound Call (2 Stage)

: Making call to analog phone connected to FXS after hearing of 2nd dial tone from AP-GS1002


VoIP to GSM Outbound Call

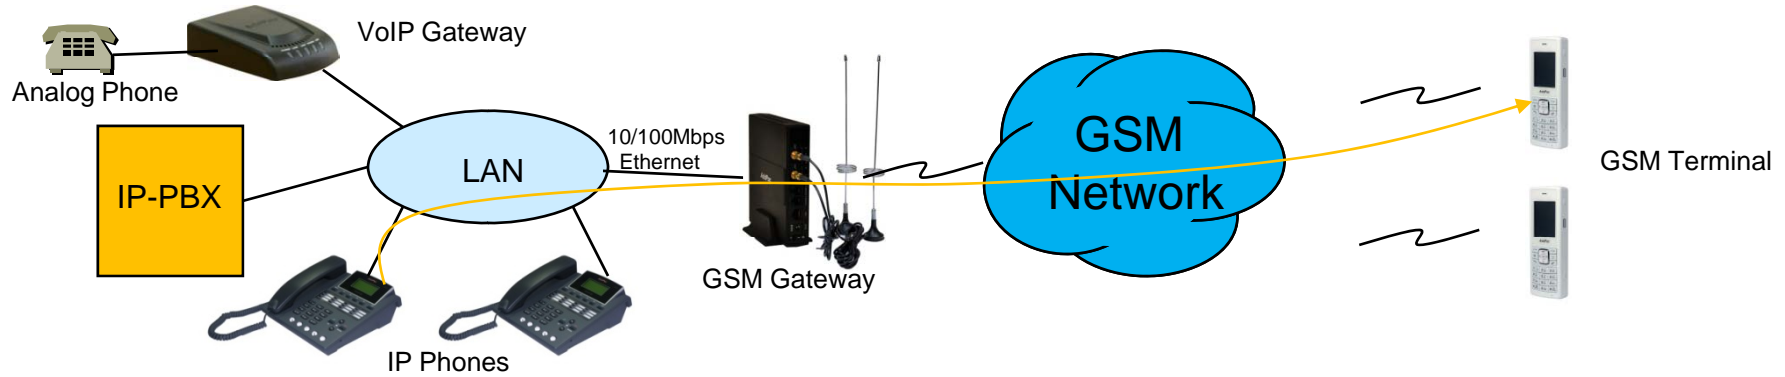

1 Stage Call

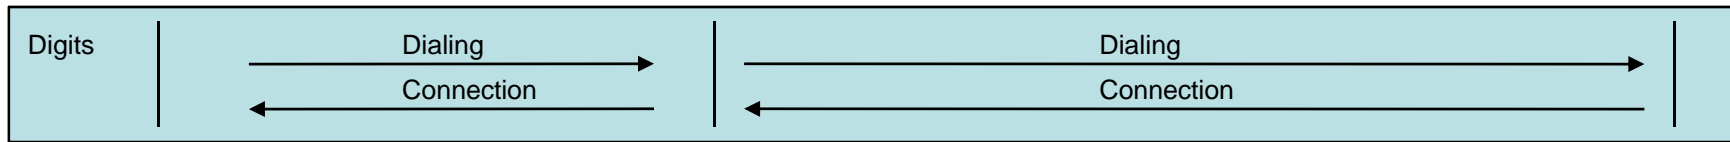

2 Stage Call

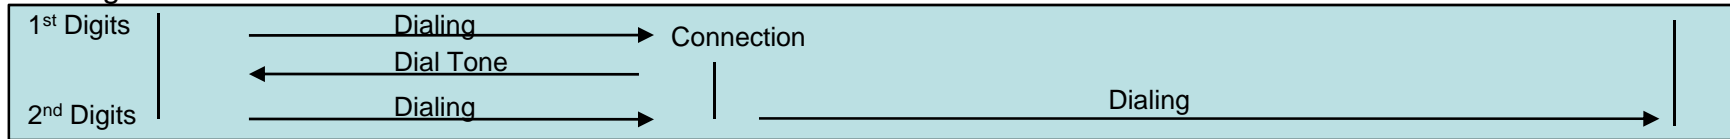


Outbound Call (1 Stage)

: Making call to mobile phone from analog phone connected to VoIP gateway or IP Phone directly


Outbound Call (2 Stage)

: Making call to mobile phone from analog phone connected to VoIP gateway after hearing of 2nd dial tone from GSM Gateway


VoIP to GSM Inbound Call

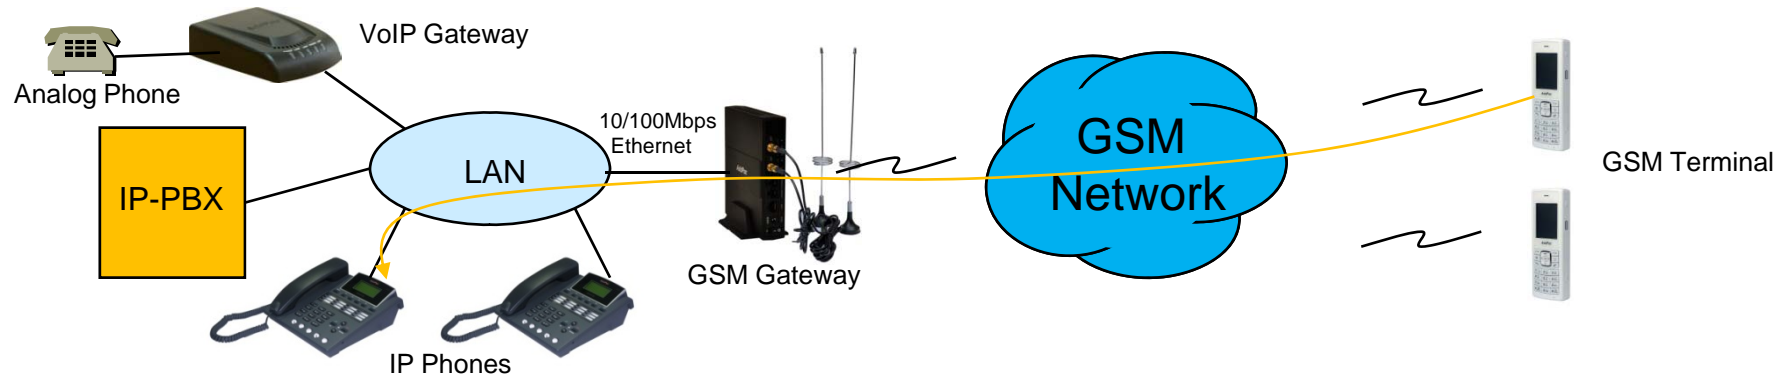

1 Stage Call (Baby Call)

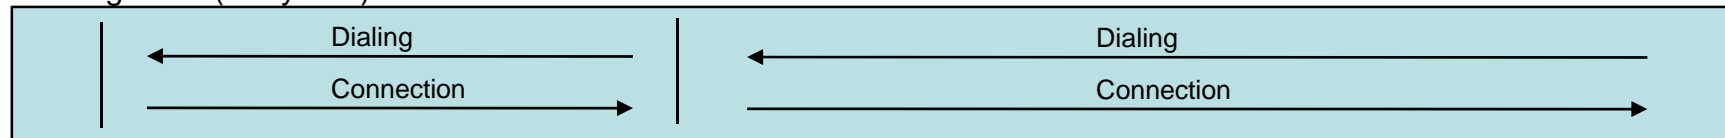

2 Stage Call

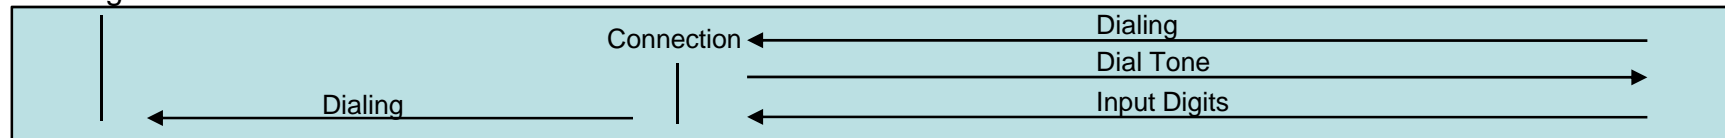


Inbound Call (1 Stage) – Baby Call

: Making call to IP phone in VoIP network directly.


Inbound Call (2 Stage)

: Making call to IP phone in VoIP network after hearing of 2nd dial tone from GSM Gateway

GSM Inbound Call Black / White list

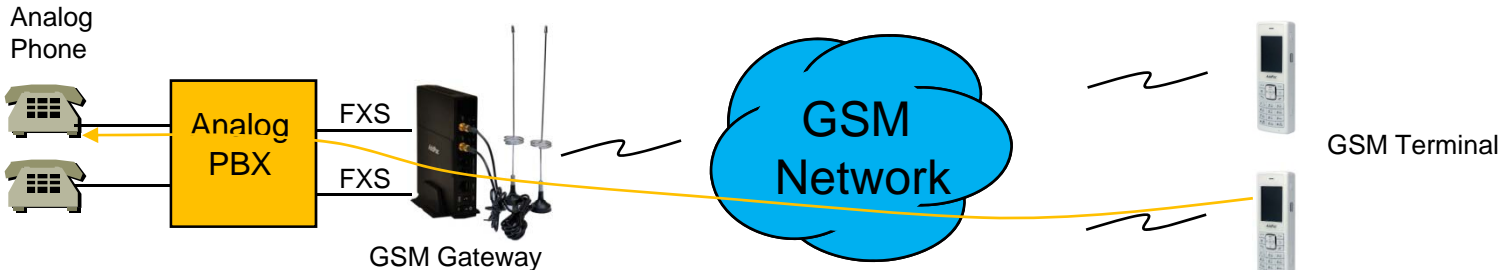


| | |
|------------|------|
| Black list | 1000 |
| White list | 2000 |

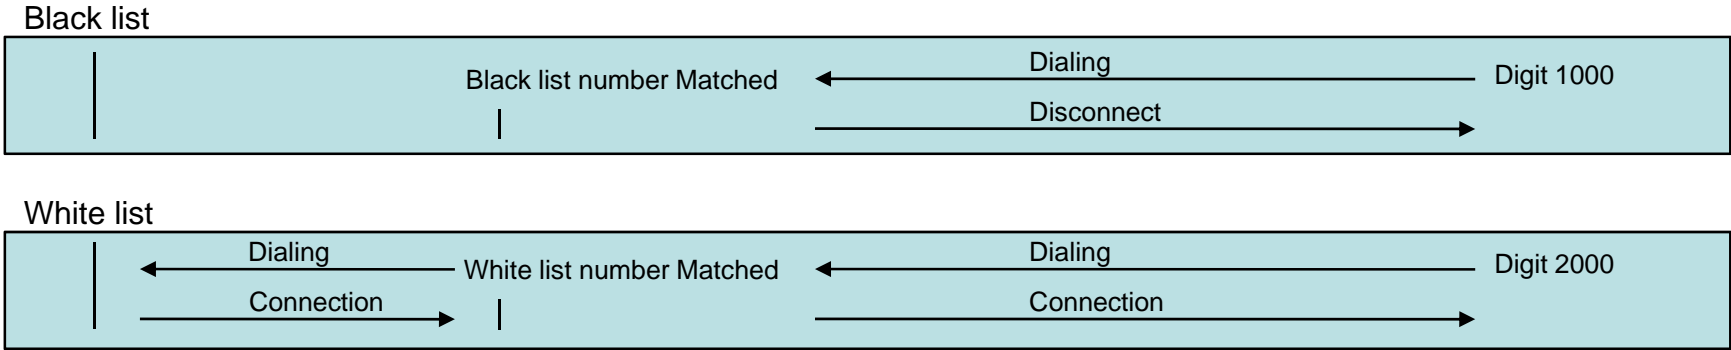


Black list
: The number on black list is restricted to receive call.

White list
: The only number on white list is allowed to receive call


VoIP to GSM Black / White list

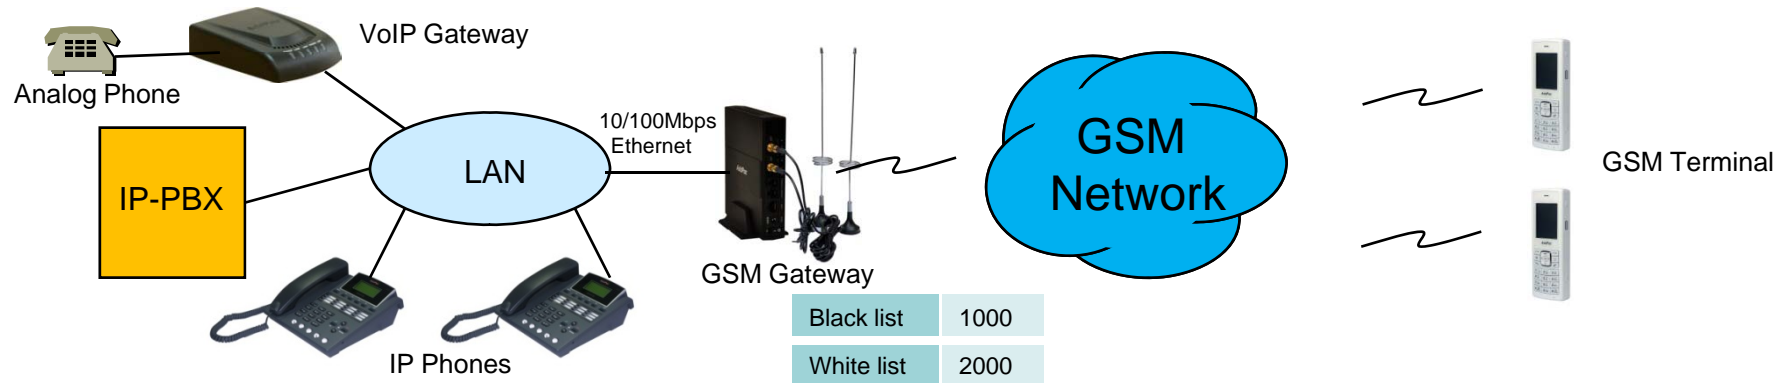

Black list

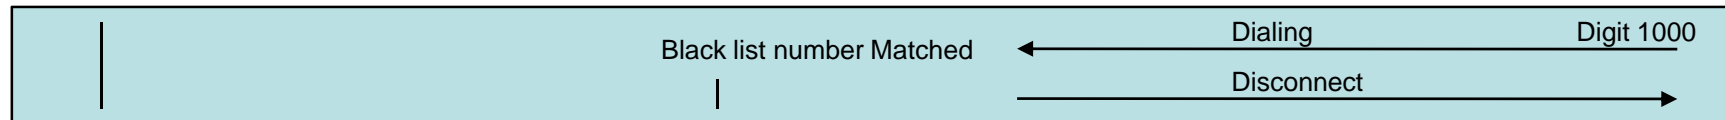

White list

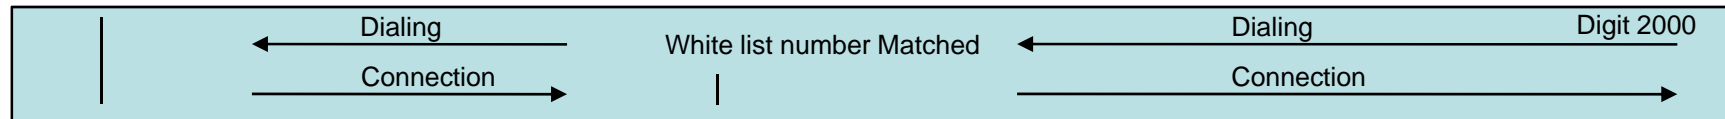


Black list

: The number on black list is restricted to receive call.

White list

: The only number on white list is allowed to receive call

WEB Callback Service

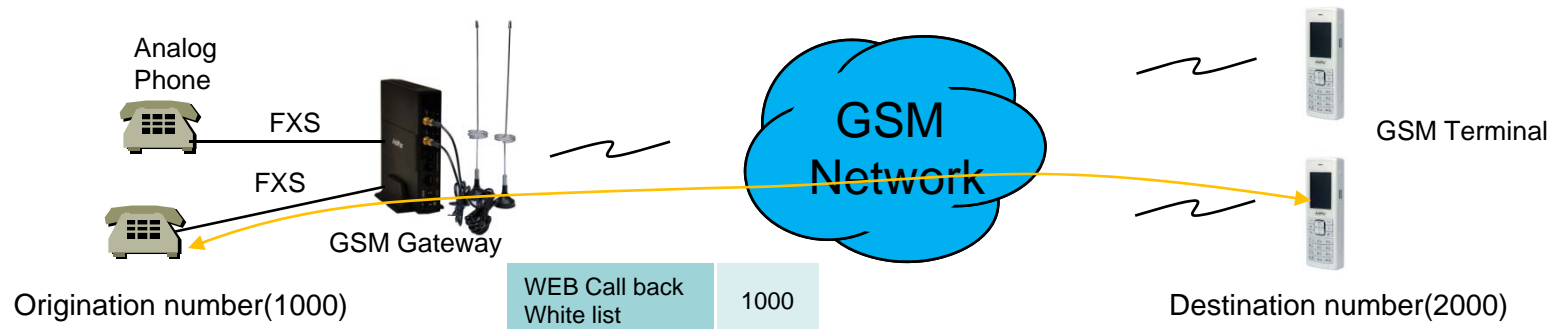


WEB Callback Service




WEB Callback Service

- : The remote call is made by user's control by WEB Interface.
- The WEB callback number on white list must be the same of source number.

GSM Callback Service

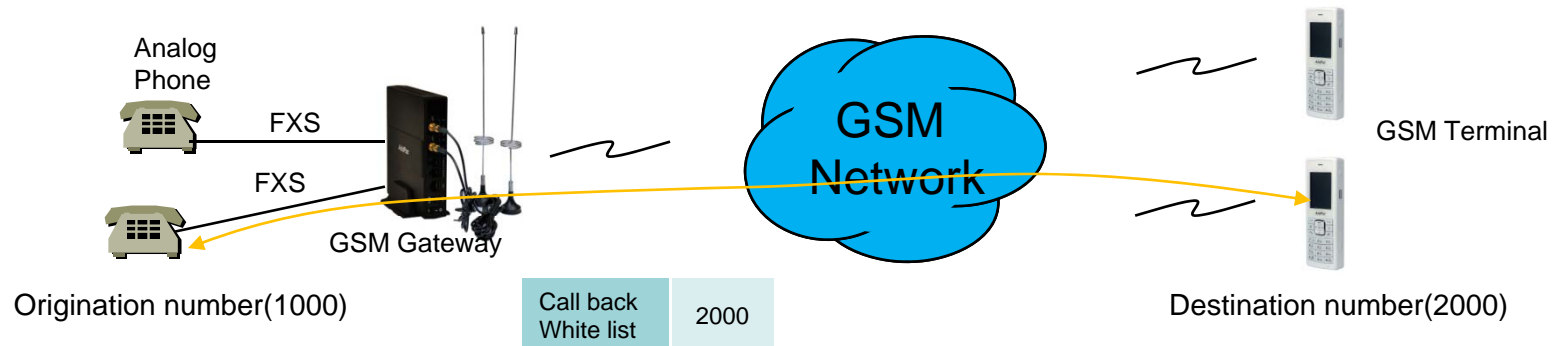


GSM Callback Service

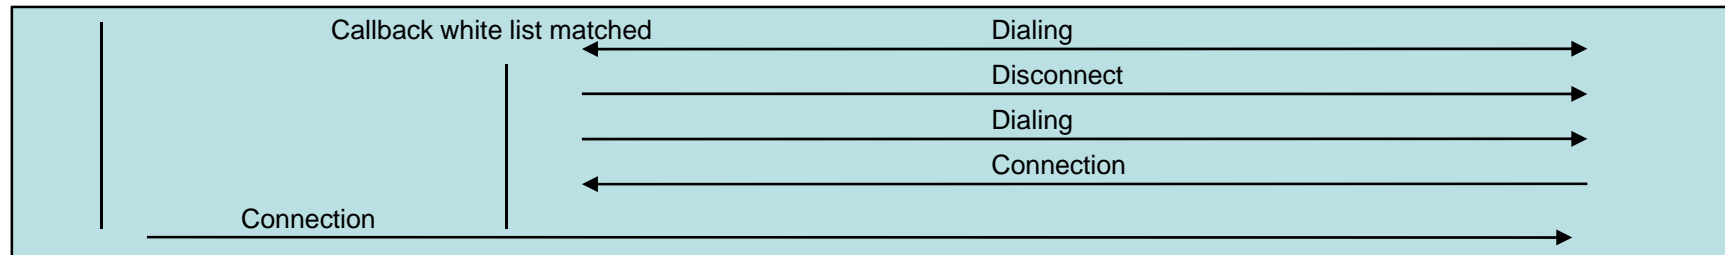


GSM Callback Service

: When the user on the callback white list makes call, GSM Gateway disconnects it and makes call back to the user

LCR(Least Cost Routing)

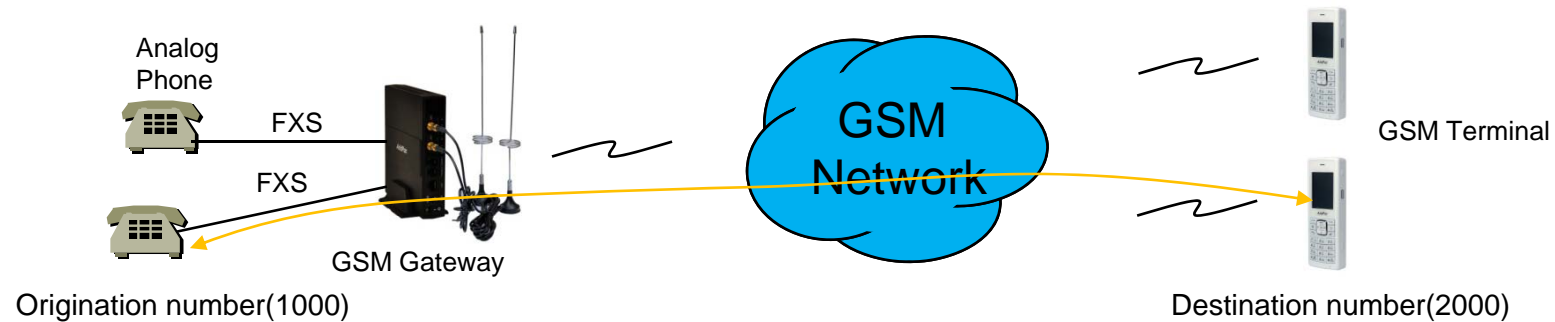

LCR(Least Cost Routing)

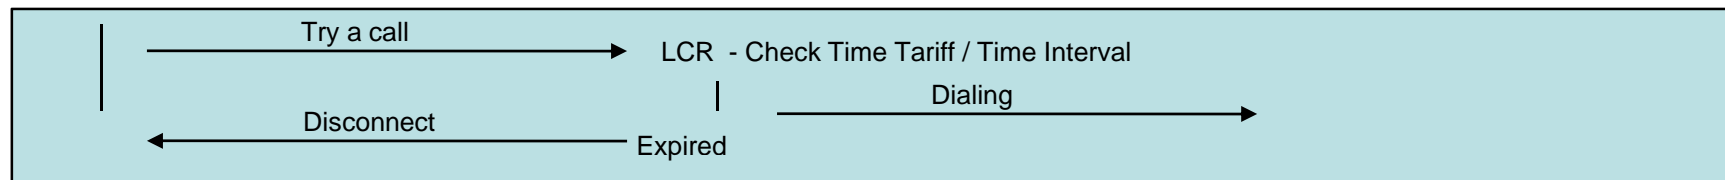

GSM LCR Time Interval

: The only registered user is allowed to use GSM call in the rule of date, week, and time


GSM LCR Time Tariff

: User is able to check remained time, used time listed on LCR, etc

GSM LCR Simulator

: GSM Gateway supports virtual call simulation used on WEB

GSM Messaging Service

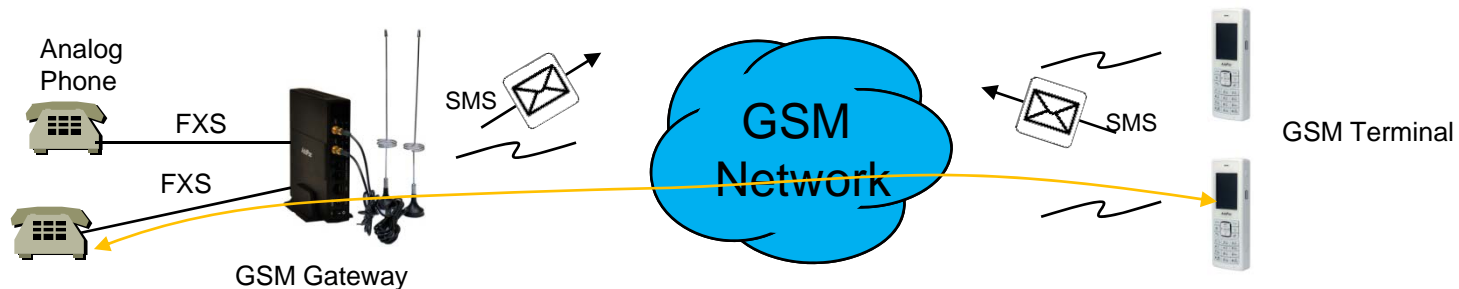


GSM Messaging Service

- : SMS is able to send and receive by GSM Gateway's WEB Interface
- : English, Korean, Spanish, Russian, Portuguese

USSD

- : In case of using Pre-paid SIM card, checking and recharging is allowed by GSM Gateway

Radius Server Interoperability

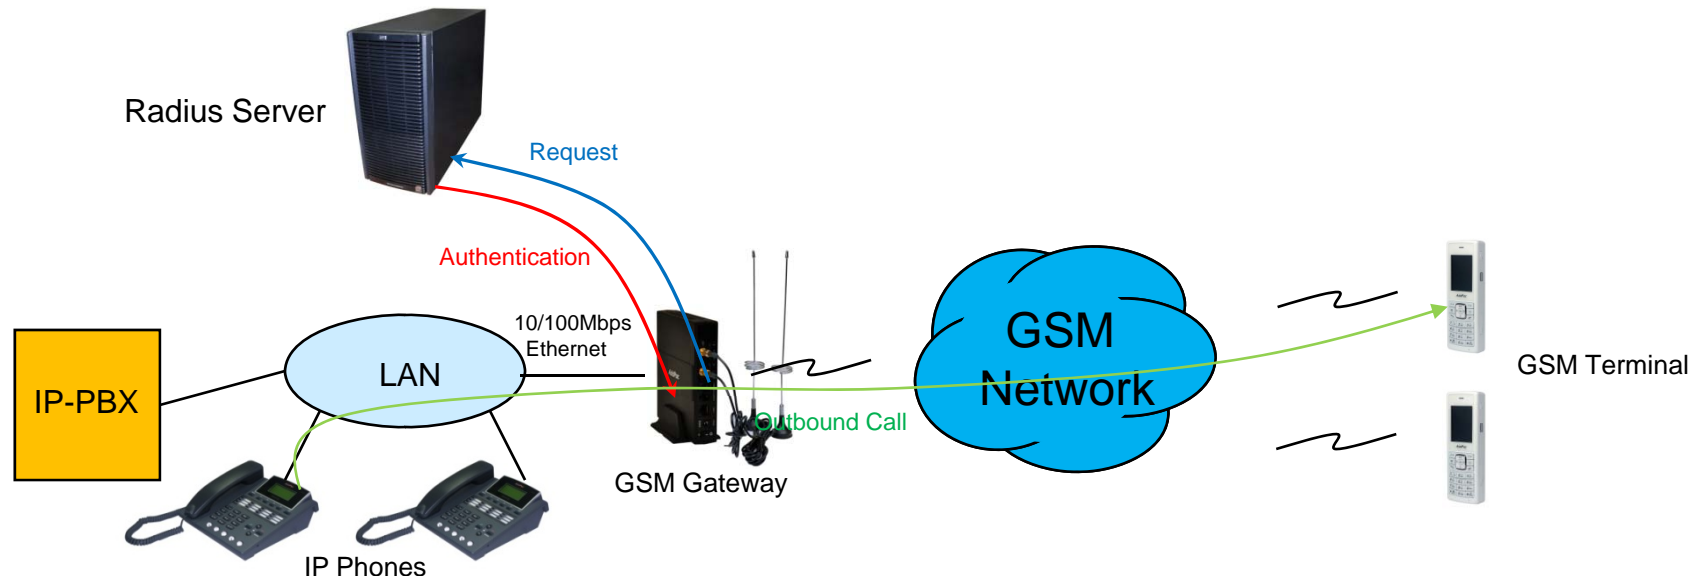

Radius Server Interoperability
: When billing system is required, GSM gateway supports radius server interoperability

GSM SOHO Gateway Series

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com