



AP250

2-Port VoIP Gateway

High Performance VoIP Gateway Solution

DNS UPDATE Features
(Dynamic Updates in the Domain Name System)



AddPac

AddPac Technology

Sales and Marketing


www.addpac.com

Contents

- AP250 H/W Specification
- What is DNS Update?
- Network Service Diagram
- APOS Commands for DNS Update

AP250 VoIP Gateway H/W Spec.


- **RISC+DSP (Audio Codec) Microprocessor Computing Power (Dual Processor Architecture)**
- **VoIP Interface**
 - 2-Port FXS, FXO Interface
- **Network Interface**
 - Two(2) 10/100Mbps Fast Ethernet
 - One(1) RS-232C Console(RJ45)
- **Power Supply**
 - External Power Adaptor (5V, 2A)
 - Power ON/OFF Switch

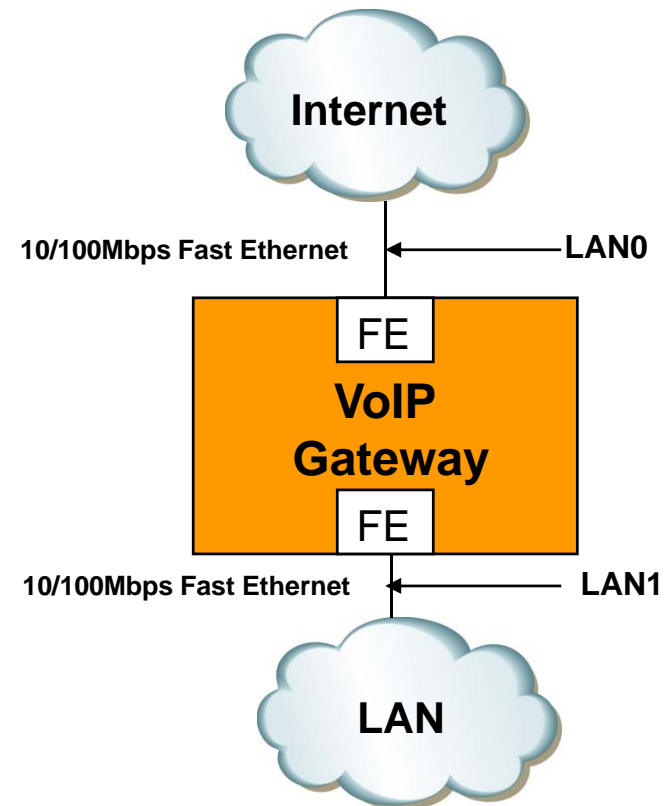

What is DNS UPDATE?

- **DNS UPDATE is used to submit Dynamic DNS Update Requests as defined in RFC2136 to a name server**
- **DNS UPDATE packet is sent to the name server when the interface address is changed.**

Network Service Diagram

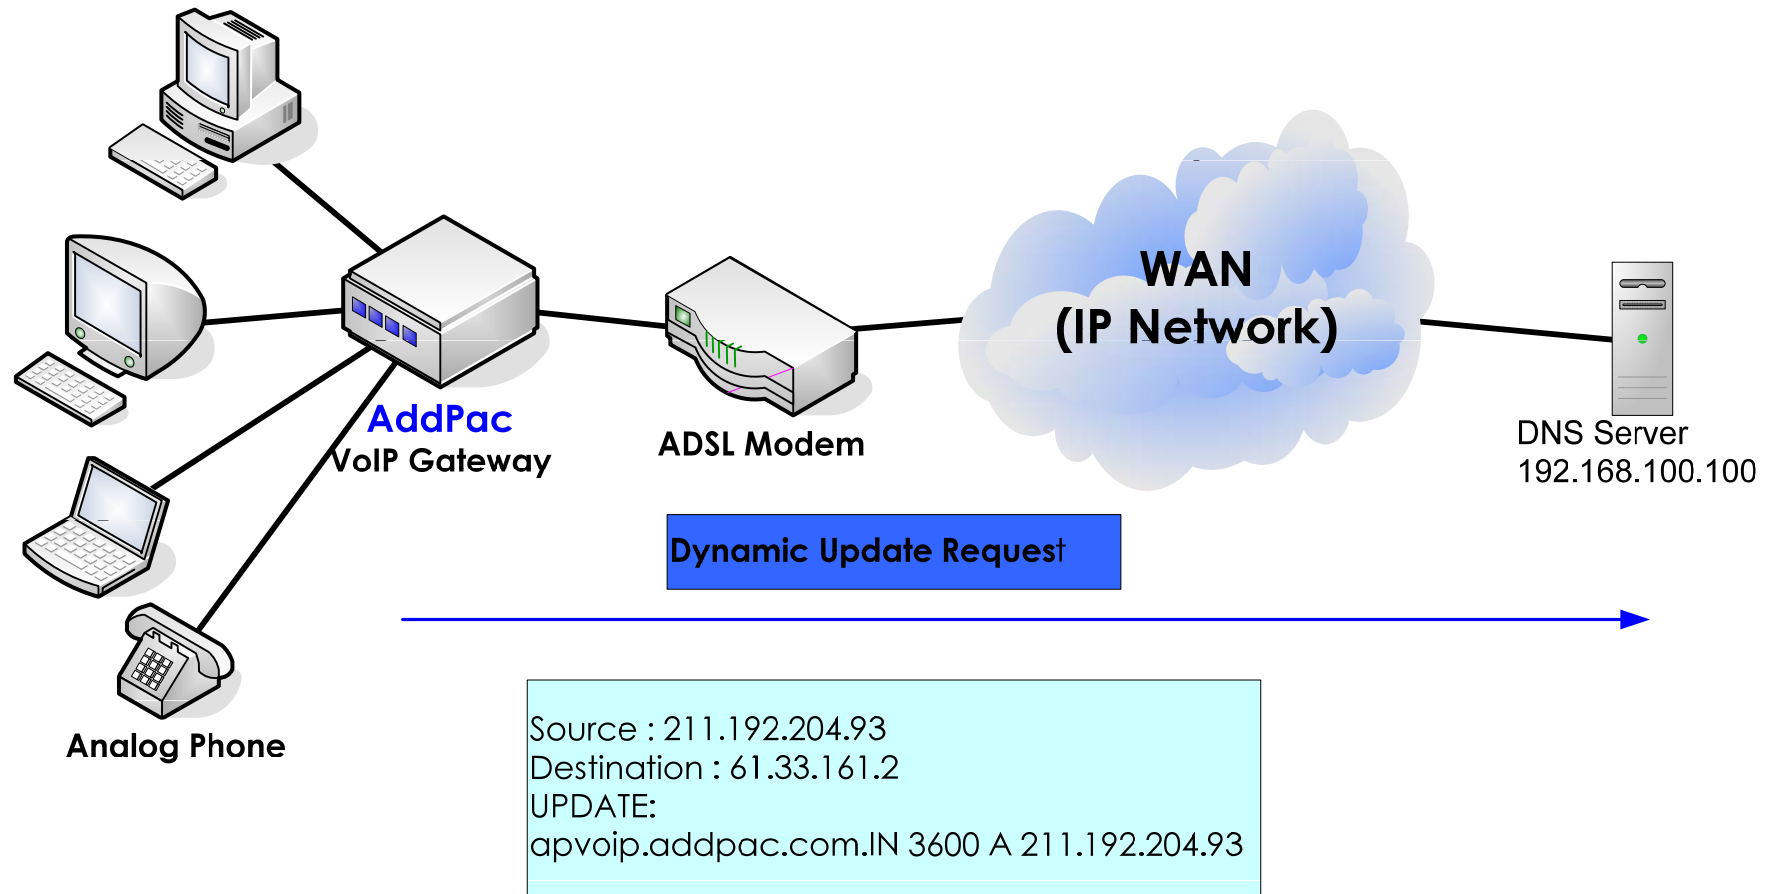

APOS Commands for DNS Update

```
nsupdate domain-name apvoip.addpac.com
nsupdate nameserver 61.33.161.2
nsupdate ttl 10
!
interface ether0.0
no ip address
encapsulation pppoe
ppp authentication pap callin
ppp pap sent-username ***** password *****
ppp echo interval 20
ppp ipcp ms-dns
ppp ipcp default-route
ip nsupdate
!
```

VoIP Gateway Series

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com