

# Video Conference AEC MIC Adaptor Solution



***AddPac***

**AddPac Technology**

Sales and Marketing

[www.addpac.com](http://www.addpac.com)

# Contents

- Video Conference AEC MIC Adaptor Network Diagram
- Video Conference AEC MIC Comparison Table
- Video Conference AEC MIC Adaptors
  - AP-MA100
  - AP-MA50
- HD Video Conference Devices



# Video Conference AEC MIC Adaptor Network Diagram (AP-MA100)



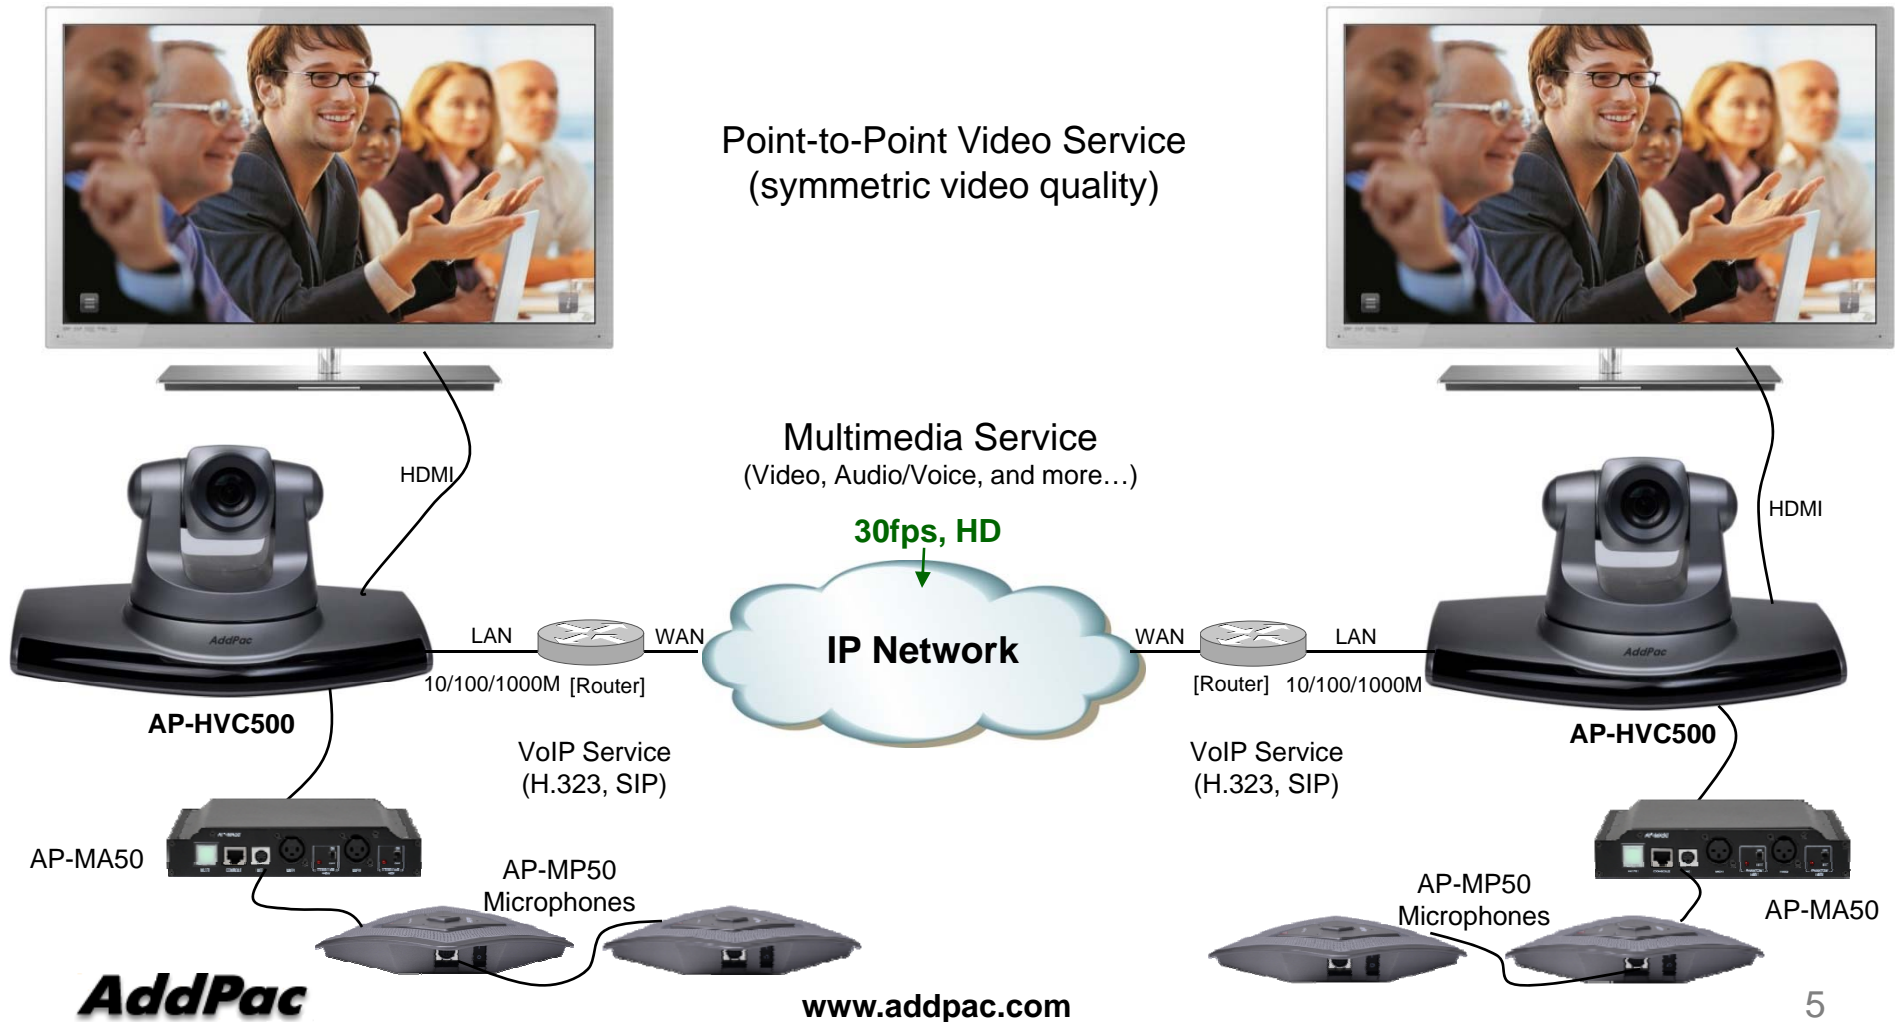
# Video Conference AEC MIC Adaptor Network Diagram (AP-MA50)





# Video Conference AEC MIC Adaptor Network Diagram

H.264, 720P, 30frame

H.264, 720P, 30frame



# Video Conference AEC MIC Adaptor Network Diagram

Model	AP-MA100	AP-MA50
Service Features		
MIC Interfaces	3.5mm Audio Connector	One(1) MIC connector for AddPac AP-MP50 Microphone (Up to three(3) AP-MP50, cascade)
	RCA Connector	
	3-pin XLR Connector (Phantom Power)	
Wideband Operation (16bit, 16Khz)	Support	Support
Mute Button with LAMP	Support	Support
Speaker Mode	HDMI & analog speaker mode both support	HDMI & analog speaker mode both support
Console Port	Support	Support
Firmware Upgrade By y-modem protocol via RS232C	Support	Support
Power On/Off Switch	Support	Support



# AP-MA100 AEC Microphone Adaptor

# Main Features

## AP-MA100 AEC Microphone Adaptor

- Acoustic Echo Canceller Micro Phone Adaptor Solution for Video Conference
- Wide band(16bits, 16kHz sampling) operation
- Support CNG(comport noise generation) to generate white noise
- Support double talk
- Noise reduction algorithm
- Support HDMI speaker mode & analog speaker mode
- S/W upgrade by y-modem protocol via RS232C
- Support CLI(Command Line Interface) to configure AEC parameters
- Mute button
- Compact Design & Still Chassis
- Phantom +48V Supply On/Off Control
- Various MIC Input Interface Support
- Power On/Off Switch



# Hardware Specification

## AP-MA100 AEC Microphone Adaptor

- DSP based Acoustic Echo Canceller Hardware Architecture
- Audio Mute Button Support
- Status LED (Mute)
- RS232C based Firmware Upgrade Architecture
- Compact Design & Still Chassis
- Power On/Off Switch
- Phantom +48V On/Off Switch
- Three(3) Type MIC Input Interface



# Hardware Specification

AP-MA100 AEC Microphone Adaptor

## Back Side



Audio Out & Power In Connector

Power On/Off Switch

## Front Side



Audio Mute Button & LAMP

RS232C Port for Firmware Upgrade

MIC Interface

Phantom +48V Interface



# AP-MA50 AEC Microphone Adaptor

# Main Features

## AP-MA50 AEC Microphone Adaptor

- Acoustic Echo Canceller Micro Phone Adaptor Solution for Video Conference
- Wide band(16bits, 16kHz sampling) operation
- Support CNG(comport noise generation) to generate white noise
- Support double talk
- Noise reduction algorithm
- Support HDMI speaker mode & analog speaker mode
- S/W upgrade by y-modem protocol via RS232C
- Support CLI(Command Line Interface) to configure AEC parameters
- Mute button
- Compact Design & Still Chassis
- Phantom +48V Supply On/Off Control
- One(1) AddPac MIC and Two(2) XLR MIC Input Interface Support
- Power On/Off Switch

# Hardware Specification

## AP-MA50 AEC Microphone Adaptor

- DSP based Acoustic Echo Canceller Hardware Architecture
- Audio Mute Button Support
- Status LED (Mute)
- RS232C based Firmware Upgrade Architecture
- Compact Design & Still Chassis
- Power On/Off Switch
- Phantom +48V On/Off Switch
- One(1) AddPac MIC Input Interface
  - Up to three(3) AddPac MIC cascade
- Two(2) XLR MIC Input Interface



# Hardware Specification

## AP-MA50 AEC Microphone Adaptor

### Back Side



Audio Out & Power In Connector

Power On/Off Switch

### Front Side



Audio Mute Button & LAMP

RS232C Port for Firmware Upgrade

One(1) AddPac MIC Interface


Two(2) XLR MIC Interface

Phantom +48V Interface

# Connection Diagram (Up to Three(3) Mic)

AP-MA50 AEC Microphone Adaptor









# HD & Full HD Video Conference Device



# HD & Full HD Video Conference Devices

Product		AP-HVC1000	AP-HVC700	AP-HVC600	AP-HVC500
					
Camera Sensor		CMOS	CCD	CMOS	CCD
Optical Zoom		x10	x18	x10	x18
Video Resolution		Full HD : 720P, 1080i	HD : 720P(1280x720)	Full HD : 720P, 1080i	HD :720P(1280x720)
Channel One(1)	Video Input	Built-in Full HD Camera	Built-in HD Camera	Built-In Full HD Camera, Composite, HD-SDI, RGB, HDMI	Built-In HD Camera, Composite, HD-SDI, RGB, HDMI
	Video Output	Composite, Component, HDMI	Composite, Component, HDMI	Composite, Component, HDMI	Composite, Component, HDMI
	Audio Input	Stereo RCA Type	Stereo RCA Type	Stereo RCA Type	Stereo RCA Type
	Audio Output	RCA Type Audio (L,R)	RCA Type Audio (L,R)	RCA Type Audio (L,R)	RCA Type Audio (L,R)
PTZ Control		N/A	N/A	Support	Support
Channel Two(2)	Video Input	Composite RCA, HD-SDI, RGB, HDMI	Composite RCA, HD-SDI, RGB, HDMI	N/A	N/A
	Video Output	Composite, Component, HDMI	Composite, Component, HDMI		
	Audio Input	Stereo RCA Type	Stereo RCA Type		
	Audio Output	RCA Type Audio (L,R)	RCA Type Audio (L,R)		
	PTZ Control	Support	Support		
LAN		One(1) 10/100M Ethernet	One(1) 10/100M Ethernet	One(1) 10/100M Ethernet	One(1) 10/100M Ethernet
Power		External Power Adaptor	External Power Adaptor	External Power Adaptor	External Power Adaptor




# HD & Full HD Video Conference Devices

Product	AP-HVC200	AP-HVC300
		
Sensor	CCD	CMOS
Optical Zoom	x18	x10
Video Resolution	HD 720P(1280x720)	Full HD 720P, 1080i
Video Output	HDMI Component, RCA	HDMI, Component, RCA
Audio Out	Stereo Left, Right RCA Out	Stereo Left, Right RCA Out
Audio In	MIC/Audio In, 3.5mm Audio Input	MIC/Audio In, 3.5mm Audio Input
LAN	One(1) 10/100M Ethernet	One(1) 10/100M Ethernet
Power	External Power Adaptor	External Power Adaptor



# SD Video Conference




# SD Video Conference Devices

Product		AP-SVC700	AP-SVC500	AP-SVC200
				
Camera Sensor		CCD	CCD	CCD
Optical Zoom		x27	x27	x27
Codec Video Resolution		SD (D1, VGA)	SD(D1, VGA)	SD(D1, VGA)
Display Video Resolution		HD	HD	HD
Channel One(1)	Video Input	Built-in SD Camera	Built-In SD Camera or Composite	Built-In SD Camera
	Video Output	Composite, Component, HDMI	Composite, Component, HDMI	Composite, Component, HDMI
	Audio Input	Stereo RCA Type	Stereo RCA Type	Stereo RCA Type
	Audio Output	RCA Type Audio (L,R)	RCA Type Audio (L,R)	RCA Type Audio (L,R)
	External PTZ Control	N/A	Support	N/A
Channel Two(2)	Video Input	Composite RCA, RGB, HDMI	N/A	N/A
	Video Output	Composite, Component, HDMI		
	Audio Input	Stereo RCA Type		
	Audio Output	RCA Type Audio (L,R)		
	External PTZ Control	Support		
LAN		One(1) 10/100M Ethernet	One(1) 10/100M Ethernet	One(1) 10/100M Ethernet
Power		External Power Adaptor	External Power Adaptor	External Power Adaptor



# Full HD Video Conference Codec

# Full HD Video Conference Codecs

Product		AP-HCC2000	AP-HCC1000	AP-HVC500
				
Video Resolution		720P, 1080i(60), 1080p(30)	720P, 1080i(60), 1080p(30)	720P, 1080i(60), 1080p(30)
Channel One(1)	Video Input	Composite RCA, HD-SDI, HDMI	Composite RCA, HD-SDI, HDMI	Composite RCA, HD-SDI, RGB, HDMI
	Video Output	Composite RCA, Component, HDMI	Composite RCA, Component, HDMI	Composite RCA, Component, HDMI
	Audio Input	Stereo RCA Type	Stereo RCA Type	Stereo RCA Type
	Audio Output	RCA Type Audio (L,R)	RCA Type Audio (L,R)	RCA Type Audio (L,R)
	PTZ Control	Support, RS232C	Support, RS232C	Support
Channel Two(2)	Video Input	Composite RCA, HD-SDI, RGB, HDMI	Composite RCA, HD-SDI, RGB, HDMI	N/A
	Video Output	Composite RCA, Component, HDMI	Composite RCA, Component, HDMI	
	Audio Input	Stereo RCA Type	Stereo RCA Type	
	Audio Output	RCA Type Audio (L,R)	RCA Type Audio (L,R)	
	PTZ Control	Support, RS232C	Support, RS232C	
Video MCU		4-Party Video MCU	N/A	N/A
LAN		One(1) 10/100/1000M Gigabit Ethernet	One(1) 10/100/1000M Gigabit Ethernet	One(1) 10/100/1000M Gigabit Ethernet
Power		External Power Adaptor	External Power Adaptor	External Power Adaptor



# Thank you!

**AddPac Technology Co., Ltd.**  
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail [sales@addpac.com](mailto:sales@addpac.com)